



The Brighter Choice



REMODEL LED Downlights

V.01

REMODEL
LED J-Box Downlight Range





Back-Lit 6"

AL-RDL12D Range



Edge-Lit 4"

AL-SDL49 Range



Edge-Lit 6"

AL-SDL614 Range



6"




Back-Lit
AL-RDL12D/** Range



Features

- Metal J-Box for Loop-In & Loop-Out Wiring
- Dimmable on most leading / trailing edge
- 120V dimmers
- Lightweight Aluminium Body
- White Bezel
- Lifetime 50,000hrs
- 5 Year Warranty
- Low Glare

Dimensions

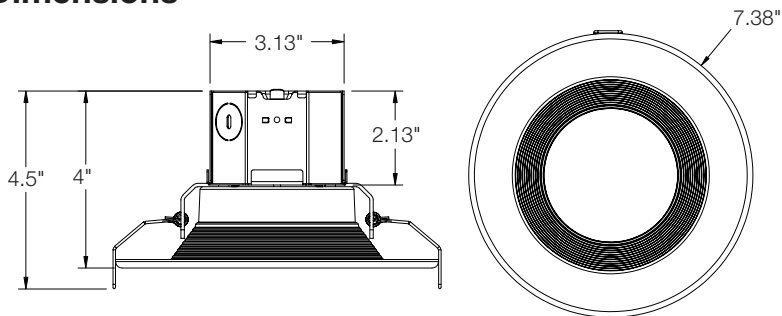

Description

A perfect solution for a Remodel, the downlight has a metal J-Box attached so no can required.

High CRI 90 provides exceptional light quality up to 1000lm.

The compact 4" height and Slim Edge Lit Design offers a modern downlighting solution.

IES files available on the ALL LED website.


Compliance & Approvals



Type	Metal JB	Dimmable	Voltage	Watt	Lumens	Color Temp	Beam	Life (hrs)	Finish	Operating Temp	Power Factor
AL-RDL12D/30	Integrated	Line Voltage	120v AC	12w	1000lm	3000K	100°	50,000hrs	White	-4°F~113°F	0.90
AL-RDL12D/40	Integrated	Line Voltage	120v AC	12w	1000lm	4000K	100°	50,000hrs	White	-4°F~113°F	0.90
AL-RDL12D/50	Integrated	Line Voltage	120v AC	12w	1000lm	5000K	100°	50,000hrs	White	-4°F~113°F	0.90

REMODEL
LED J-Box Downlight Range

6" Back-Lit Downlight Metal J-Box

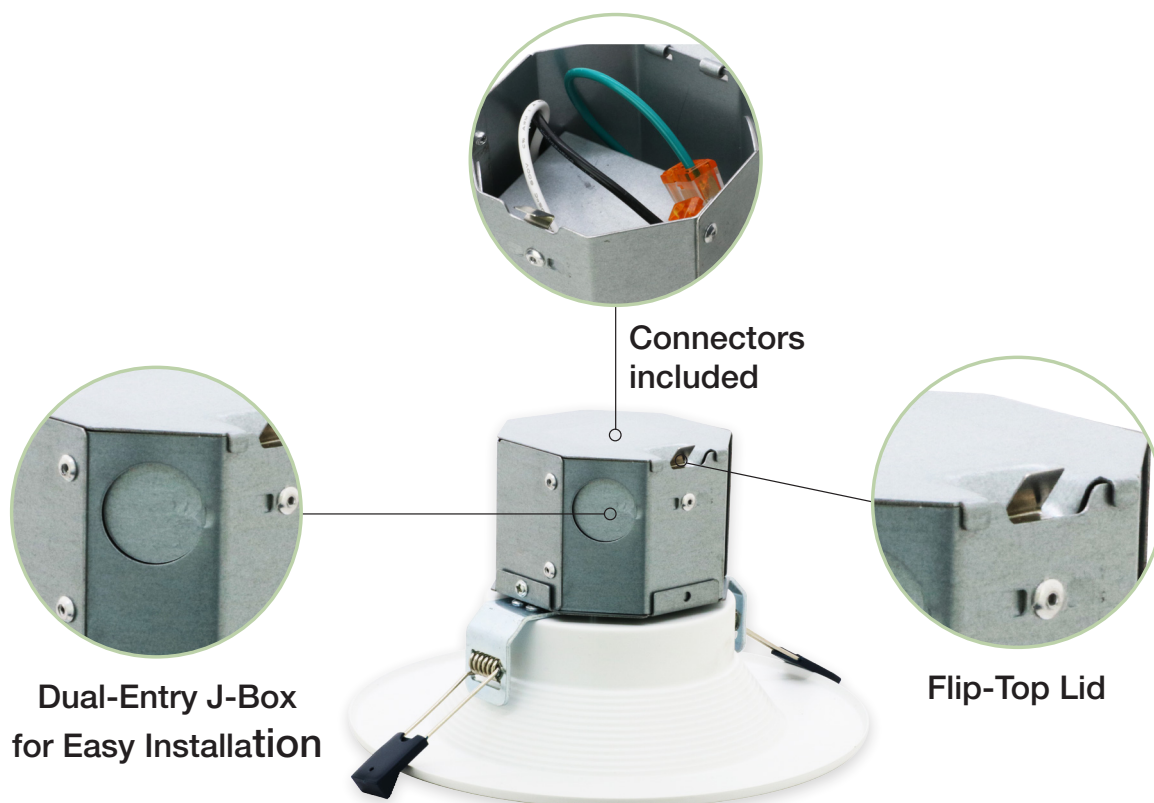

4"




Edge-Lit
AL-SDL49/** Range



Features

- Metal J-Box for Loop-In & Loop-Out Wiring
- Dimmable on most leading / trailing edge
- 120V dimmers
- Lightweight Aluminium Body
- White Bezel
- Lifetime 50,000hrs
- 5 Year Warranty
- Low Glare

Dimensions

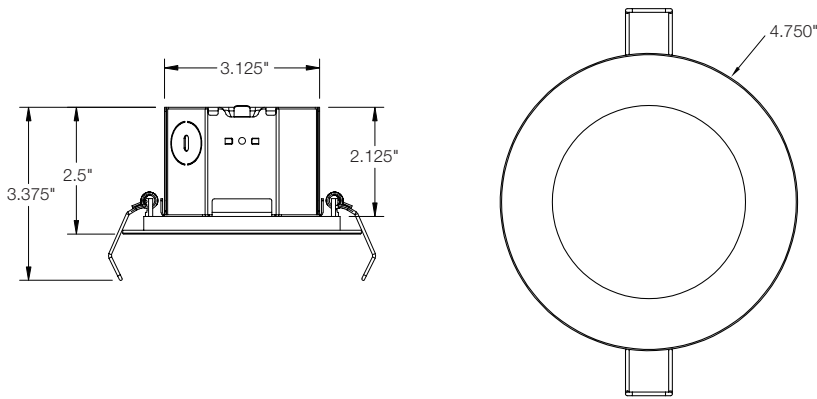

Compliance & Approvals



Description

A perfect Solution for a Remodel, the downlight has a metal J-Box attached so no can required.

Excellent CRI 90 provides exceptional light quality up to 1000lm.

The compact 4" height and Slim Edge Lit Design offers a modern downlighting solution.

IES files available on the ALL LED website.

Type	Metal JB	Size	Dimmable	Voltage	Watt	Lumens	Color Temp	Beam	Lifetime	Finish	Operating Temp	Power Factor
AL-SDL49/30	Integrated	4"	Line Voltage	120v AC	9w	650lm	3000K	100°	50,000hrs	White	-4°F~113°F	0.90
AL-SDL49/50	Integrated	4"	Line Voltage	120v AC	9w	650lm	5000K	100°	50,000hrs	White	-4°F~113°F	0.90

6"




Edge-Lit
AL-SDL614/** Range



Features

- Metal J-Box for Loop-In & Loop-Out Wiring
- Dimmable on most leading / trailing edge
- 120V dimmers
- Lightweight Aluminium Body
- White Bezel
- Lifetime 50,000hrs
- 5 Year Warranty
- Low Glare

Dimensions

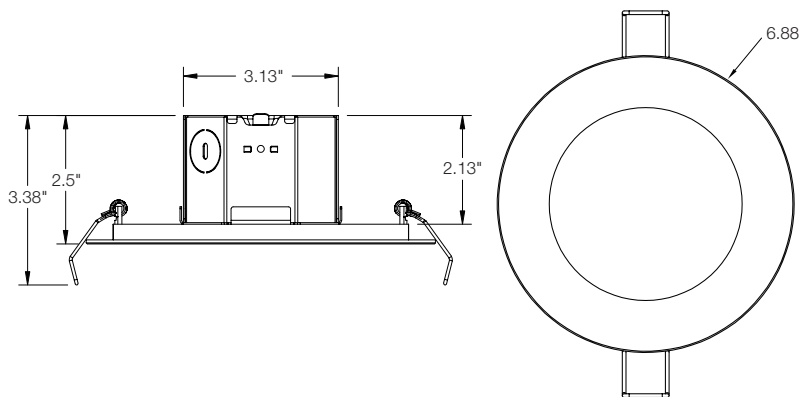

Description

A perfect Solution for a Remodel, the downlight has a metal J-Box attached so no can required.

Excellent CRI 90 provides exceptional light quality up to 1000lm.

The compact 4" height and Slim Edge Lit Design offers a modern downlighting solution.

IES files available on the ALL LED website.

Compliance & Approvals



Type	Metal JB	Size	Dimmable	Voltage	Watt	Lumens	Color Temp	Beam	Lifetime	Finish	Operating Temp	Power Factor
AL-SDL614/30	Integrated	6"	Line Voltage	120v AC	14w	950lm	3000K	100°	50,000hrs	White	-4°F~113°F	0.90
AL-SDL614/50	Integrated	6"	Line Voltage	120v AC	14w	950lm	5000K	100°	50,000hrs	White	-4°F~113°F	0.90



USA Sales

ALL-LED USA LLC 12035 34th St N, Suite 2,
St Petersburg, FL 33716

Tel: 727 524 4270
Fax: 727 290 3914
Email: sales@all-ledusa.com

Warranty:

For full warranty information please visit:
Website: www.all-ledusa.com

V.01: 2019