

TECHNICAL DATASHEET




AL-TF24345CCT/PS/EM

Emergency 2'x4' LED Center Basket Troffer CCT & Power Selectable



DIMENSIONS

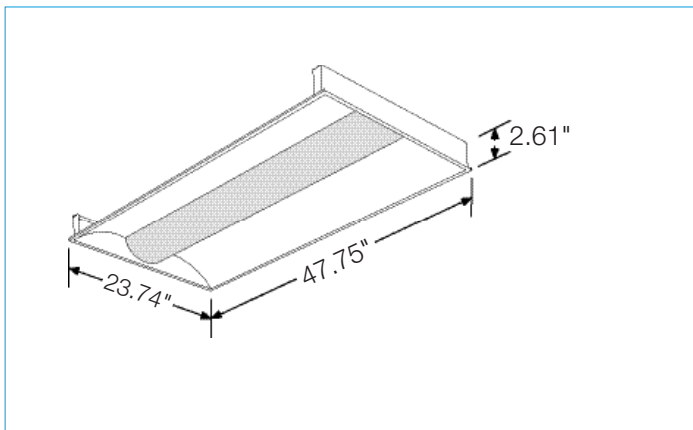

PRODUCT CODE	AL-TF24345CCT/PS/EM
Dimming	0-10V Dimmable
Voltage	120 - 277V AC
Watts	30w/ 40w/ 50w
Lumens	3750lm/5000lm/6250lm
Lumens/W	125lm/W
Color Temp	3500K/ 4000K/ 5000K
Life (hrs)	50,000 hours
W x L x H	23.74 x 47.75 x 2.61"
Emergency (Minutes)	90 min 8w 1000lm

PRODUCT FEATURES

- **Power and CCT Adjustable**
- Color selectable 3500K, 4000K, 5000K
- Wattage selectable 30w/ 40w/ 50w
- Emergency LED battery provides minimum 90 minutes of operation at approximately 25% output
- Meets or exceeds all National Electric Code and Life Safety Code Emergency Lighting Requirement
- A range of high energy-efficiency LED Troffers for office and commercial lighting applications
- Suitable for installation in T-bar suspended ceilings.
- Optical polycarbonate diffuser, for even light distribution with 120° beam angle
- Total depth including the driver box 2.61"
- CRI>80
- High power factor - 0.90
- 0-10V Dimming
- Operating temperature 32°F to 104°F
- Suitable for damp locations
- DLC Premium (DesignLights Consortium®) certified
- (L70) at 50,000 hour lifetime
- 5 Year warranty



REMOVABLE DUST COVER



REAR VIEW

