



## TECHNICAL DATASHEET

### AL-BLP22-20/30/40-3CCT/EM Emergency Back-Lit 20W/30W/40W 2'x2' LED Dimmable Panel Adjustable Color 3500K, 4000K or 5000K

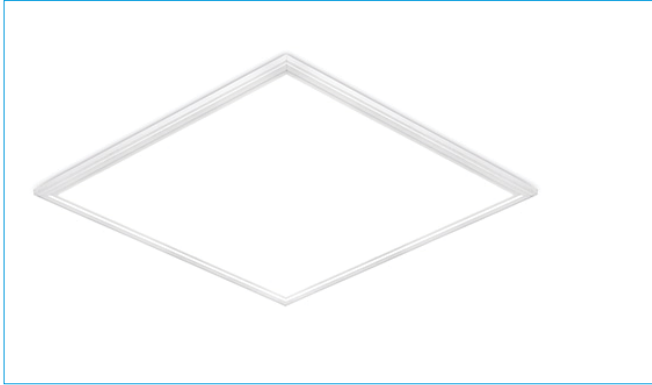

#### DIMENSIONS

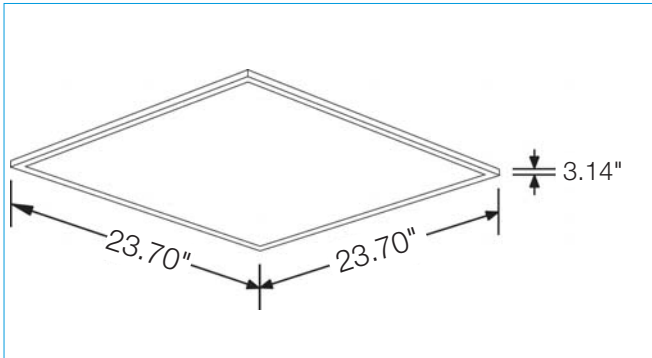

#### PRODUCT FEATURES

- ALL-LED Back-lit LED Flat Panels are now available with an emergency LED battery pack that provides minimum 90 minutes of operation at approximately 25% output, backup in the event of a power failure.
- Color selectable 3500K, 4000K, 5000K
- Wattage selectable 20w/ 30w/ 40w
- A range of energy-efficiency back-lit LED flat panels for office & commercial lighting applications
- Suitable for installation in T-bar suspended ceilings. Optional
- Drywall, surface mount or suspension kit accessories are available
- Easy installation & maintenance free
- PMMA light guide material and diffuser, for even light distribution with 120° beam angle
- PMMA will not discolor
- (L70) at 50,000 hours lifetime
- Total depth including the Emergency box 3.14"
- CRI>80
- High power factor - 0.90
- ALL-LED'S dimmable panels provide a simple 0-10V solution that is compatible with stand alone 0-10V dimmers as well as larger lighting control systems and allows for installation with daylight or occupancy sensors
- Compatible with Lutron 0-10V Dimmers
- Operating temperature -4°F to 104°F
- Suitable for damp locations
- DLC (DesignLights Consortium®) certified
- 5 Year Warranty

Product	AL-BLP22-20/30/40-3CCT/EM
Dimmable	0-10v Dimming
Voltage	120-277v AC
Watts	20w/ 30w/ 40w
Lumens	2500lm/3750lm/5000lm
Lumens/W	125lm/w
Color Temp	3500K/ 4000K/ 5000K
Lifetime	50,000 hours
W x L x H	23.70" x 23.70" x 1.38"
Weight	7.7lbs
Beam Angle	120°
Emergency	90mins 15W 1875LM

