



# TECHNICAL DATASHEET



**AL-BLP24-40/50/55-3CCT**  
**Back-Lit 40W/50W/55W 2'x4' LED Dimmable**  
**Panel Adjustable Color 3500K, 4000K or 5000K**

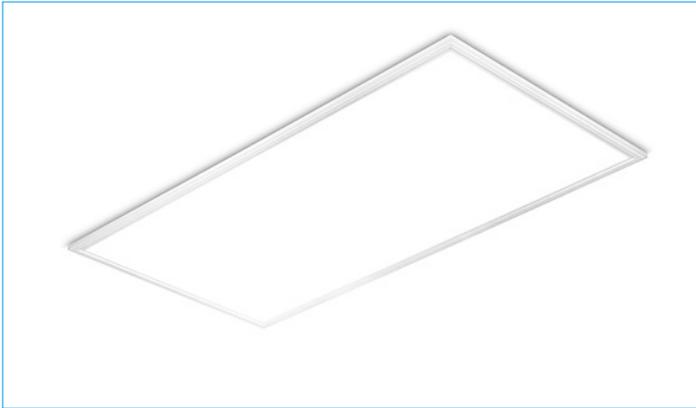

## DIMENSIONS

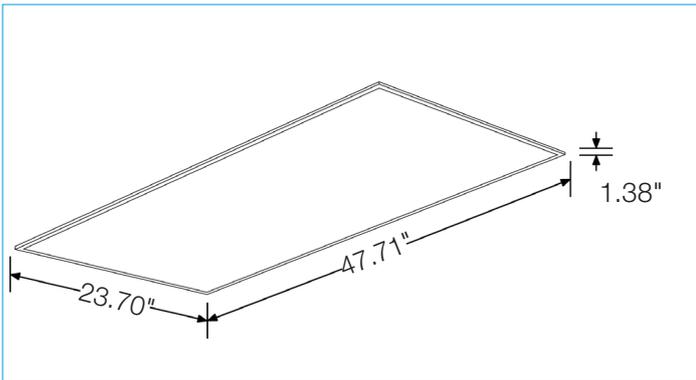

Product	AL-BLP24-40/50/55-3CCT
Dimmable	0-10v Dimming
Voltage	120-277v AC
Watts	40W/ 50W/ 55W
Lumens	5000lm/6250lm/6875lm
Lumens/W	125lm/w
Color Temp	3500K/ 4000K/ 5000K
Life (hrs)	50,000 hrs
W x L x H	23.70" x 47.71" x 3.14"
Beam Angle	120°

## PRODUCT FEATURES

- **Power and CCT Adjustable**
- Color selectable 3500K, 4000K, 5000K
- Wattage selectable 40w/ 50w/ 55w
- A range of high energy-efficiency edge-lit LED flat panels for office & commercial lighting applications
- Suitable for installation in T-bar suspended ceilings. Optional
- Drywall, surface mount or suspension kit accessories are available
- Easy installation & maintenance free
- PMMA light guide material and PS diffuser, for even light distribution with 120° beam angle.
- PMMA will not discolor.
- Total depth including the driver box 1.38"
- CRI>80
- High power factor - 0.90
- ALL-LED'S dimmable panels provide a simple 0-10V solution that is compatible with stand alone 0-10V dimmers as well as larger lighting control systems and allows for installation with daylight or occupancy sensors
- Compatible with Lutron 0-10V Dimmers
- Operating temperature 32°F to 104°F
- Suitable for damp locations
- DLC (DesignLights Consortium®) certified
- (L70) at 50,000 hour lifetime

