

TECHNICAL DATASHEET

APEX

High Power Linear LED Highbays

AR-LHB2165BD/50


LINEAR 2FT 165W LED HIGH BAY



PRODUCT FEATURES

- Suitable for use in warehousing, manufacturing, conference centers, industrial and retail applications
- Significant energy savings and maintenance free
- Suitable for most 0-10V dimmers - allows for installation with daylight or occupancy sensors
- Suspension from heights of 10' to 40'
- Accessory kit includes suspension hangers, 2 x suspension chains, mounting box when installing with 3/4" all thread pipe
- Operating temperature -4°F to 122°F
- Suitable for Damp location
- High transmission PS diffuser fitted as standard
- 120° beam angle
- High power factor 0.90
- Color temperature 5000K
- (L70) at **50,000 hour lifetime**
- **5 Year warranty**

DIMENSIONS

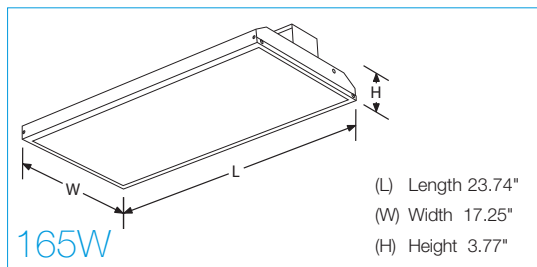

165W

50,000
HRS
lifetime

120°
Beam angle

DAMP
LOCATIONS

≤21000
lumens

Quality Assured

UL
LISTED

CRI
80

0-10V DIMMABLE
COMPATIBLE WITH
LUTRON DVSTV

FC

5
Year
Warranty

DLC
PREMIUM

| Model | AR-LHB2165BD/50 |
|-----------------------|-----------------|
| Power | 165W |
| HID Equiv | 400W |
| Lumens | ≤21000lm |
| Weight | 12.15lbs |
| Input Voltage | 100-277V AC |
| Color Temperature | 5000k |
| CRI | >80 |
| Location Information | Damp Location |
| Warranty | 5 Years |
| Operating Temperature | -4°F~+122°F |
| Beam Angel | 120° |
| Lifetime | 50,000hrs |
| Dimmable | 0-10V |