

TECHNICAL DATASHEET


AR-D56 Range 5-6" PRO LED DOWNLIGHT RANGE



PRODUCT FEATURES

- Modular concept makes this range ideal for use across many applications including retrofit and new construction
- Interchangeable LEDchroic™ polycarbonate lenses with multi-faceted halogen like appearance
- 3 Beam angles: Narrow (25°), Medium (40°), Wide (75°)
- Available in fixed, recessed baffle, cones and adjustable versions
- Available color temperatures 2700K, 3000K, 3500K, 4000K, 5000K
- Interchangeable bezels / baffles color coded to achieve a desired look
- High color rendering index, CRI90
- Line voltage dimmable
- Operating temperature -4°F to 104°F
- IC rated when installed in IC rated CAN
- 120V Input, 60Hz and 0.083A Input Current
- Title 24 High Energy compliance for California
- 50,000hr L70
- 5 Year Warranty



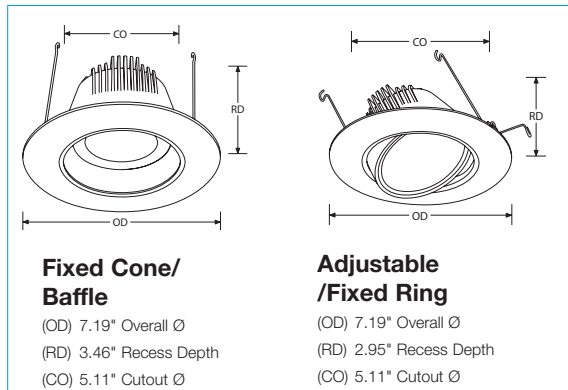






DIMENSIONS



Compliance & Approvals



CONFIGURATOR

															
Downlight Module	Size	Lens		Cone / Baffle / Ring		Acc Color		Trim / Acc Color		CRI		Color Temp			
AR-D56	5-6"	N	Narrow	C1		Cone		WH	White	9	CRI90	/ 27 2700K			
		M	Medium	B1		Baffle		AB	Antique Bronze			/ 30 3000K			
		W	Wide	F1		Fixed Ring		SN	Satin Nickel			/ 35 3500K			
				A1		Adj Ring						/ 40 4000K			
												/ 50 5000K			

ORDERING EXAMPLE

AR-D + SIZE + LENS + C/B/R + T + CRI + CT = AL-D56NB1WH9/27

Downlight module	+ Size	+ Lens	+ Cone or Baffle or Ring	+ Trim	+ CRI	+ Color Temp
AR-D	56	N	B1	WH	9	/ 27