




AL-FC45675CCT

Full Cutoff Wall Pack - CCT & Wattage Selectable

PRODUCT FEATURES

- Suitable for use on exterior warehousing, industrial, and commercial buildings
- Significant energy savings and maintenance free
- 0-10V dimming with most 0-10V dimmers
- IK08 polycarbonate lens with 90° x 100° beam as standard
- Instant on/off, no re-strike delay
- AC100-277 volts
- Suitable for wet locations IP65
- Power selectable 45W/60W/75W
- CCT selectable 3000K, 4000K, 5000K
- (L70) at 50,000 hours lifetime
- Optional photocell AL-FCPC

Dimensions

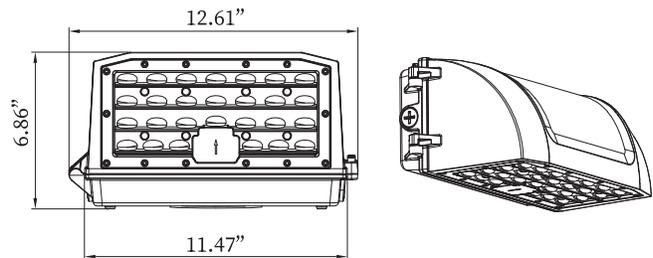

Product Code	AL-FC45675CCT
Power	45w / 60w / 75w
120 Lumens Per Watt	5400lm / 7200lm / 9000lm
Color Temperature	CCT Selectable (3000K / 4000K / 5000K)
Net Weight	4.18 lbs
Input Voltage	100-277V AC
Power Factor	0.90
LED Type	SMD
CRI	>80
Location Information	Wet Location
Warranty	5 Years
Operating Temperature	-40°F~122°F
Beam Angle	90° x 100°
Frequency	50/60hz
Dimming Protocol	0-10V
Body Material	Die-Cast Body, polycarbonate Lens
Impact Resistance	IK08

