

AL-BLP22-20/30/40W-3CCT

Back Lit CCT & Power Adjustable LED 2'X2' Dimmable LED Panel

PRODUCT FEATURES

- Power and CCT adjustable
- Color selectable 3500K, 4000K, 5000K
- Wattage selectable 20w/ 30w/ 40w
- A range of high energy-efficiency back-lit LED flat panels for office & commercial lighting applications
- Suitable for installation in T-bar suspended ceilings. Optional drywall, surface mount or suspension kit accessories are available
- Easy installation & maintenance free
- PMMA light guide material with 120° beam angle
- PMMA will not discolor
- Total depth including the driver box 1.38"
- CRI>80
- High power factor - 0.90
- ALL-LED's dimmable panels provide a simple 0-10V solution that is compatible with stand alone 0-10V dimmers as well as larger lighting control systems and allows for installation with daylight or occupancy sensors
- Compatible with Lutron 0-10V dimmers
- Operating temperature -4°F to 104°F
- Suitable for damp locations
- DLC (DesignLights Consortium®) certified
- (L70) at 50,000 hours lifetime
- EMERGENCY option available (AL-BLP22-20/25/30-CCT/EM)

ACCESSORIES

AR-SKLPB100 - SUSPENSION KIT

AR-DWK22C - Dry wall flange kit

AL-SMKBL22 - Surface mount kit


Product Code	AL-BLP22-20/30/40W-3CCT
Dimmable	0-10v Dimming
Voltage	120-277v AC
Watts	20w/ 30w/ 40w
Lumens	2500lm/3750lm/5000lm/w
Lumens/W	125lm/w
Color Temp	3500K/ 4000K/ 5000K
Lifetime	50,000 hours
W x L x H	23.70" x 23.70" x 1.38"
Weight	7.7lbs
Beam Angle	120°
15w EMERGENCY 90min	1875lm

Product Code	AL-BLP22-20/30/40W-3CCT/EM
--------------	----------------------------

EM - 90mins

15W 1875LM

Dimensions

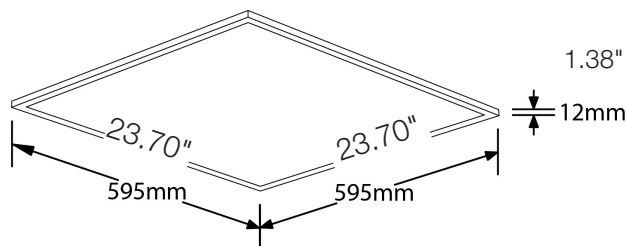

EMERGENCY depth including junction box 3.25"



Email us at info@all-ledusa.com

www.all-ledusa.com