






# ULTI-BAY Ultimate Performance LED HIGHBAY







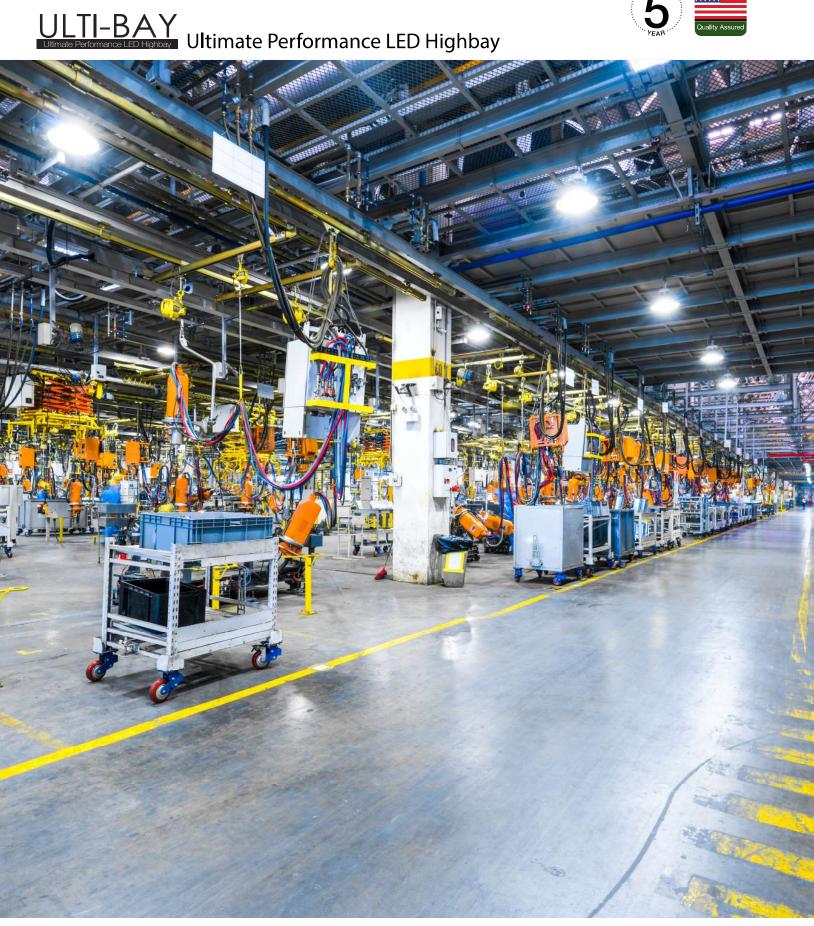



# ULTI-BAY Ultimate Performance LED Highbay



## 100W Ulti-Bay

AL-HB100D/50









# 150W Ulti-Bay

AL-HB150D/50











# 200W Ulti-Bay

AL-HB200D/50









## 150W NSF Ulti-Bay

AL-HBNSF150/50















# TI-BAY © Performance LED Highbay Ultimate Performance LED Highbay







100W Ulti-Bay AL-HB100D/50





### Description


The new and improved Ulti-Bay has been redesigned using the latest LED technology. Featuring the patented Twist&Lock Sensor, which has been designed for installation into the center of the Highbay, without the need for any tools! Tool free installation of the easily programmable Microwave Sensor into the heart of the Ulti-Bay maintains the horizontal balance of the super lightweight Highbay for optimum aesthetics. Available in 100w, 150w, and 200w versions.

IES files available on the ALL LED website.

#### **Features**

- Significant Energy Savings
- Maintenance Free
- Suitable for Wet Location (IP65)
- Easy Install Twist and Lock Microwave Sensor\*
- Remote Control for Sensor
- Instant On/Off, No Restrike Delay
- 50,000 hours (L70)
- 5 Year Warranty

#### **Dimensions**




Height

d: Height

100W :4.17" 150W :4.57." 200W

:5.12"



Diameter

100W :12.60" 150W :14.17" 200W :15.55"





# TI-BAY Performance LED Highbay Ultimate Performance LED Highbay







## 150W Ulti-Bay AL-HB150D/50





## 200W Ulti-Bay AL-HB200D/50





### Compliance & Approvals





















| Product Code | Dimming        | Voltage       | Watt | Lumens    | Colour<br>Temp | Beam | Lifetime  | Location<br>Information | Operating Temp | Power<br>Factor | Warranty |
|--------------|----------------|---------------|------|-----------|----------------|------|-----------|-------------------------|----------------|-----------------|----------|
| AL-HB100D/40 | 0-10v Dimmable | 100 - 277v AC | 100w | ≤14000 lm | 4000K          | 120° | 50000 hrs | Wet Location            | -31°F - +131°F | 0.90            | 5 Year   |
| AL-HB100D/50 | 0-10v Dimmable | 100 - 277v AC | 150w | ≤14000 lm | 5000K          | 120° | 50000 hrs | Wet Location            | -31°F - +131°F | 0.90            | 5 Year   |
| AL-HB150D/40 | 0-10v Dimmable | 100 - 277v AC | 150w | ≤21000 lm | 4000K          | 120° | 50000 hrs | Wet Location            | -31°F - +131°F | 0.90            | 5 Year   |
| AL-HB150D/50 | 0-10v Dimmable | 100 - 277v AC | 150w | ≤21000 lm | 5000K          | 120° | 50000 hrs | Wet Location            | -31°F - +131°F | 0.90            | 5 Year   |
| AL-HB200D/40 | 0-10v Dimmable | 100 - 277v AC | 150w | ≤28000 lm | 4000K          | 120° | 50000 hrs | Wet Location            | -31°F - +131°F | 0.90            | 5 Year   |
| AL-HB200D/50 | 0-10v Dimmable | 100 - 277v AC | 200w | ≤28000 lm | 5000K          | 120° | 50000 hrs | Wet Location            | -31°F - +131°F | 0.90            | 5 Year   |





AL-MSCF Programmable Twist&Lock Microwave Sensor AL-RC Microwave Sensor Commissioning Remote Control



AL-RF100AL 70° Reflector (100w Model) AL-RF150AL 70° Reflector (150w Model) AL-RF200AL 70° Reflector (200w Model)



AL-RF100ACR 90° Reflector (100w Model) AL-RF150ACR 90° Reflector (150w Model) AL-RF200ACR 90° Reflector (200w Model)




AL-HBUB U-Shaped Surface Mounting Bracket



AL-HBAKM10 Highbay Adaptor Kit- 3/4" NPT to M10

# ULTI-BAY Ultimate Performance LED Highbay Ultimate Performance LED Highbay



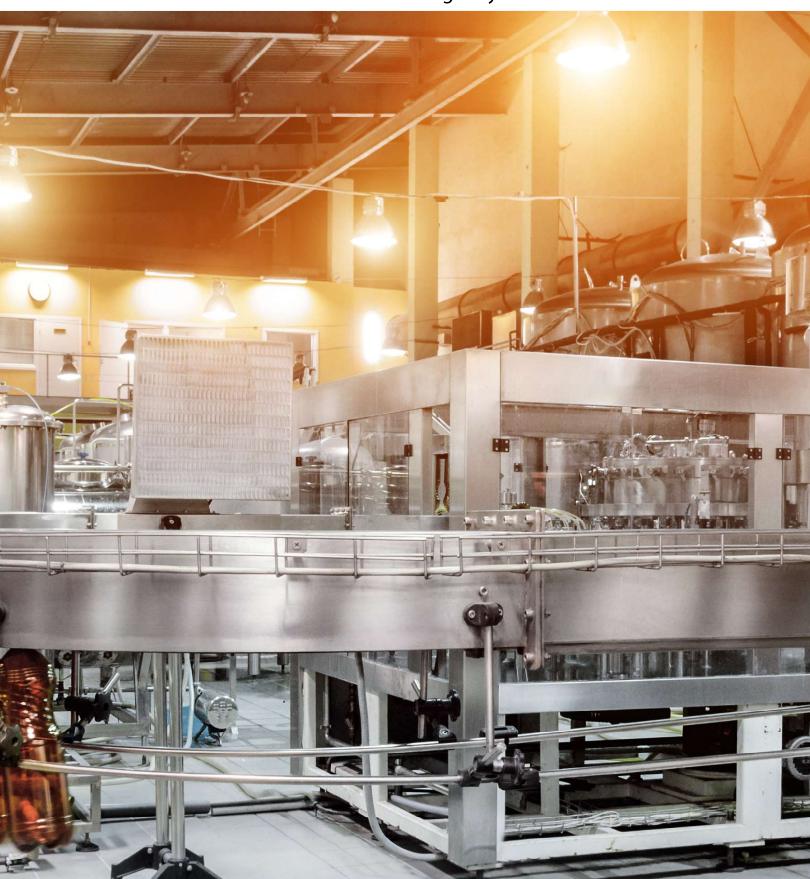

# TI-BAY Performance LED Highbay NSF LED Wash-Down Highbay







150W NSF Ulti-Bay

AL-HBNSF150/50








### Description

The LED Wash-Down NSF Certified Highbay meets the highly maintained and regulated guidelines to be used in food processing areas. The Ulti-Bay is designed to help prevent dirt, dust, or food from collecting on the surface of the Highbay.

The Ultra-modern design can withstand high pressure cleaning and freezing temperatures, for even the most stringent of food preparation environments.

IES files available on the ALL LED website.

#### **Dimensions**



### Compliance & Approvals











### **Features**

- NSF Certified for Food Processing Environment
- Ultimate Design Eliminates exposed hardware and screws which helps prevent build-up of dust and moisture
- Suitable for High Pressure Cleaning, IP69
- 0-10v Dimmable
- Multi-Voltage (100-277v AC)
- Instant On/Off, No Restrike Delay
- 50,000 hours (L70)
- 5 Year Warranty
- Significant Energy Savings
- Maintenance Free














| Product Code   | NSF             | Dimming | Voltage       | Watt | Lumens    | Colour<br>Temp | CRI | Beam | Lifetime     | Location<br>Information | Operating<br>Temp | Power<br>Factor | Warranty |
|----------------|-----------------|---------|---------------|------|-----------|----------------|-----|------|--------------|-------------------------|-------------------|-----------------|----------|
| AL-HBNSF150/50 | NSF<br>Approved | 0-10v   | 100 - 277v AC | 150w | ≤21000 lm | 5000K          | >80 | 120° | 50000<br>hrs | Wet Location            | -31°F -<br>+113°F | 0.90            | 5 Year   |





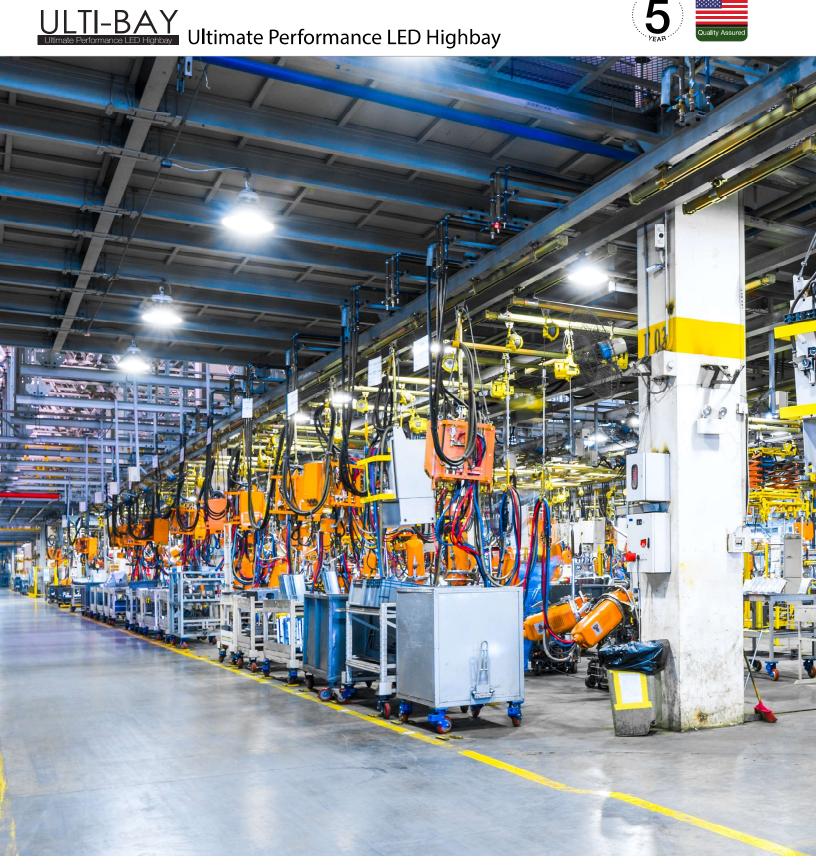



ALL-LED USA LLC 12035 34th St N, Suite 2, St Petersburg, FL 33716

**Tel**: 727 524 4270 Fax: 727 290 3914

Email: sales@all-ledusa.com

Warranty:

For full warranty information please visit: Website: www.all-ledusa.com

V.02: 2021