

TECHNICAL DATASHEET

AL-RL*/*/CCT

EXCALIBUR RECESSED LINEAR 2FT / 4FT

4" & 6"



PRODUCT FEATURES

- **For Installation Into Suspended Ceilings Only**
- Grid Ceiling T-Bar Mount Design
- Integral LED Driver
- CCT Selectable (3000K / 3500K / 4000K)
- Input Voltage 100-277V AC
- 0-10V Dimmable
- CRI 80
- Quick Fit
- 4" and 6" Available in 2ft or 4ft
- Suitable for Damp Location
- (L70) at 50,000 Hours Lifetime
- 5 Year Warranty

PART NUMBER BUILDER

AL-RL*/*/CCT

SELECT LENGTH


2 - 2FT

4 - 4FT


SELECT WIDTH

4 - 4"


6 - 6"

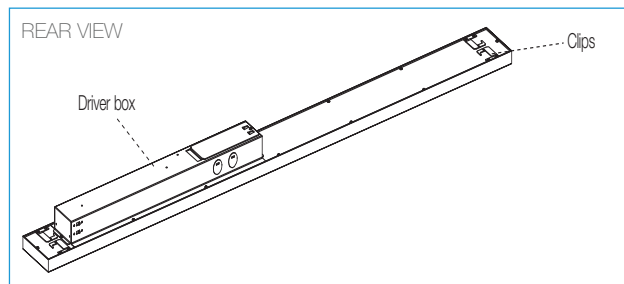

PROFILE

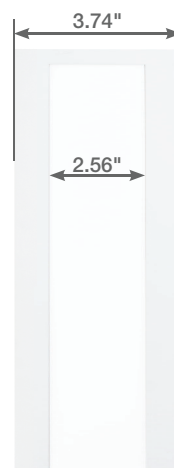

4"

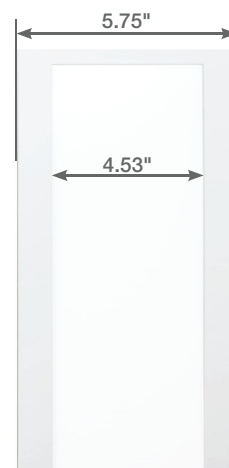

6"

PRODUCT CODE	AL-RL/2/4/CCT	AL-RL/2/6/CCT	AL-RL/4/4/CCT	AL-RL/4/6/CCT
WATTAGE	20W	20W	40W	40W
LUMENS	1800lm	2100lm	3800lm	4400lm
BEAM ANGLE	120°	120°	120°	120°
CCT	3000K / 3500K / 4000K	3000K / 3500K / 4000K	3000K / 3500K / 4000K	3000K / 3500K / 4000K
CRI	>80	>80	>80	>80
LIFETIME	50,000 hours	50,000 hours	50,000 hours	50,000 hours
OPERATING TEMPERATURE	-4°~113°F	-4°~113°F	-4°~113°F	-4°~113°F
LOCATION INFORMATION	Damp Location	Damp Location	Damp Location	Damp Location
VOLTAGE	100 - 277V AC	100 - 277V AC	100 - 277V AC	100 - 277V AC
Dimmable	0-10v Dimmable	0-10v Dimmable	0-10v Dimmable	0-10v Dimmable
Warranty	5 Years	5 Years	5 Years	5 Years