

TECHNICAL DATASHEET

APEX

High Power Linear LED Highbays

AL-LHB4225BD/50EM


LINEAR 225W LED HIGH BAY



PRODUCT FEATURES

- Suitable for use in warehousing, manufacturing, conference centers, industrial and retail applications
- Significant energy savings and maintenance free
- Suitable for most 0-10V dimmers - allows for installation with daylight or occupancy sensors **Sensor and remote sold separately**
- Suspension from heights of 10' to 40'
- Accessory kit includes suspension hangers, 2 x suspension chains, mounting box when installing with 3/4" all thread pipe
- Operating temperature -4°F to 122°F
- Suitable for Damp location
- High transmission PS diffuser fitted as standard
- 120° beam angle
- High power factor 0.90
- Color temperature 5000K
- (L70) at **50,000 hour lifetime**
- **5 Year warranty**
- **Emergency - 90min at 3000lm**

DIMENSIONS

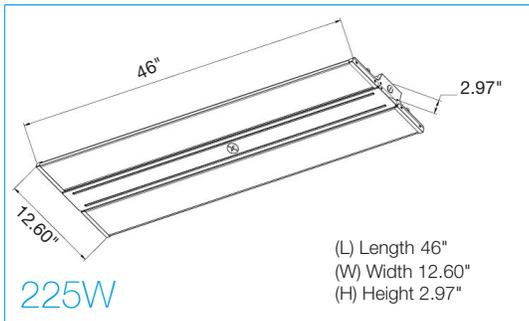

225W

50,000 HRS lifetime

120° Beam angle

DAMP LOCATIONS

≤29000 lumens

EM Emergency

UL LISTED

CRI 80

0-10V DIMMABLE COMPATIBLE WITH LUTRON DVSTV

FC

5 Year Warranty

DLC LISTED PREMIUM

Model	AL-LHB4225BD/50EM
Power	225W
EM x 24Watt -90min	>3000lm
Lumens	≤29000lm
Weight	17.82lbs
Input Voltage	100-277V AC
Color Temperature	5000k
CRI	>80
Location Information	Damp Location
Warranty	5 Years
Operating Temperature	-4°F~+122°F
Beam Angel	120°
Lifetime	50,000hrs
Dimmable	0-10V