



TECHNICAL DATASHEET

AL-BLP14-20/25/30-3CCT
Back-Lit 20W/ 25W/30W 1'x4' LED Dimmable
Panel Adjustable Color 3500K, 4000K or 5000K

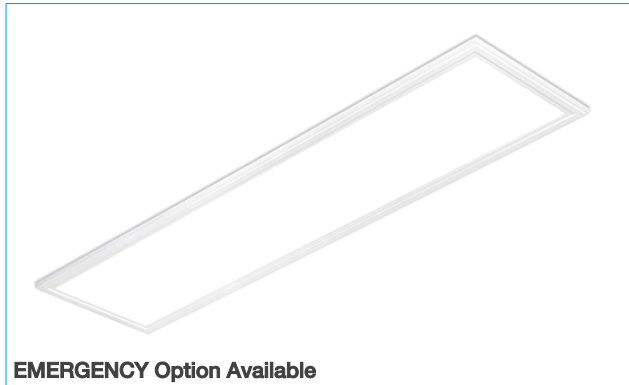

DIMENSIONS

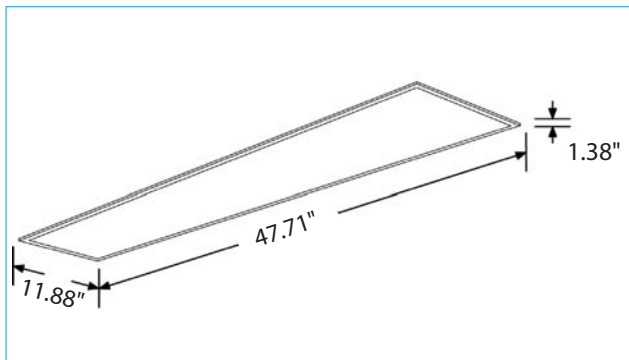

PRODUCT FEATURES

- Power and CCT Adjustable
- Color selectable 3500K, 4000K, 5000K
- Wattage selectable 20w/ 25w/ 30w
- A range of high energy-efficiency back-lit LED flat panels for office & commercial lighting applications
- Suitable for installation in T-bar suspended ceilings. Optional Drywall, surface mount or suspension kit accessories are available Easy installation & maintenance free
- PMMA light guide material and PS diffuser, for even light distribution with 120° beam angle
- PMMA will not discolor
- Total depth including the driver box 1.38"
- CRI>80
- High power factor - 0.90
- ALL-LED'S dimmable panels provide a simple 0-10V solution that is compatible with stand alone 0-10V dimmers as well as larger lighting control systems and allows for installation with daylight or occupancy sensors Compatible with 0-10V Dimmers to 1%
- Operating temperature -4°F to 104°F
- Suitable for damp locations
- DLC (DesignLights Consortium®) certified
- (L90) at 50,000 hours lifetime
- Emergency Option Available

Product	AL-BLP14/20/25/30-3CCT
Dimmable	0-10v Dimming to 1%
Voltage	120-277v AC
Watts	20w/ 25w/ 30w
Lumens	2500lm/3125lm/3700 lm
Lumens/W	125lm/w
Color Temp	3500K/ 4000K/ 5000K
Life (hrs)	50,000 hrs
W x L x H	11.88" x 47.71" x 1.38"
Weight	8.25 lbs
Beam Angle	120°

