



TECHNICAL DATASHEET

AL-BLP22-20/30/40-3CCT Back-Lit 20W/ 30W/40W 2'X2' LED Dimmable Panel Adjustable Color 3500K, 4000K or 5000K

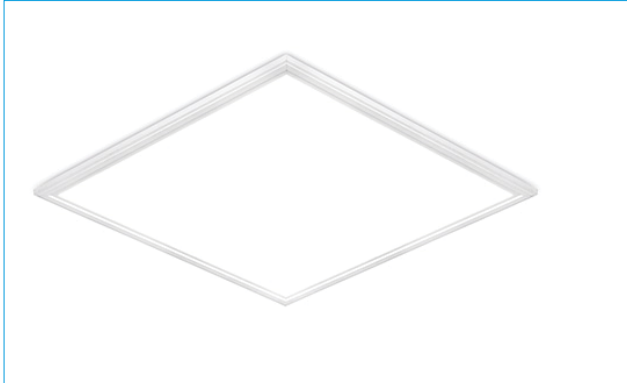

DIMENSIONS

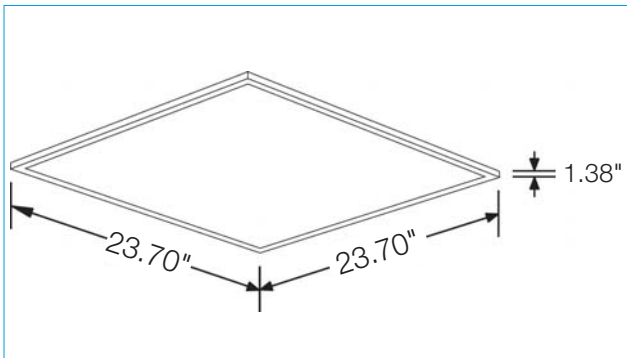

PRODUCT FEATURES

- Power and CCT Adjustable
- Color selectable 3500K, 4000K, 5000K
- Wattage selectable 20w/ 30w/ 40w
- A range of high energy-efficiency back-lit LED flat panels for office & commercial lighting applications
- Suitable for installation in T-bar suspended ceilings. Optional
- Drywall, surface mount or suspension kit accessories are available
- Easy installation & maintenance free
- PMMA light guide material with 120° beam angle
- PMMA will not discolor
- Operating temperature -4°F to 104°F
- Total depth including driver box 1.38"
- CRI>80
- High power factor - 0.90
- ALL-LED'S dimmable panels provide a simple 0-10V solution that is compatible with stand alone 0-10V dimmers as well as larger lighting control systems and allows for installation with daylight or occupancy sensors
- 0-10V Dimmable to 1%
- (L90) at 50,000 hours lifetime
- Suitable for damp locations
- Premium DLC (DesignLights Consortium®) certified
- Emergency Option Available
- 5 Year Warranty

Product	AL-BLP22-20/30/40-3CCT
Dimmable	0-10v Dimmable to 1%
Voltage	120-277v AC
Watts	20w/ 30w/ 40w
Lumens	2500lm/3750lm/5000lm
Lumens/W	125lm/w
Color Temp	3500K/ 4000K/ 5000K
Lifetime	50,000 hours
W x L x H	23.70" x 23.70" x 1.38"
Weight	7.7lbs
Beam Angle	120°

