



TECHNICAL DATASHEET

AL-BLP24-40/50/55-3CCT/EM
 Emergency Back Lit 40W/50W/55W 2'X4' LED Dimmable
 Panel Adjustable Color 3500K, 4000K or 5000K

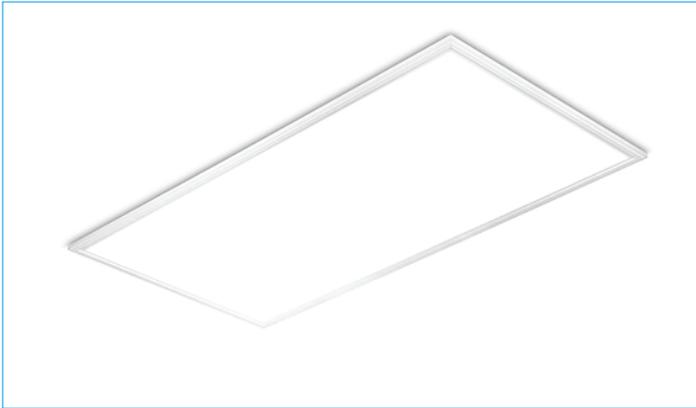

DIMENSIONS

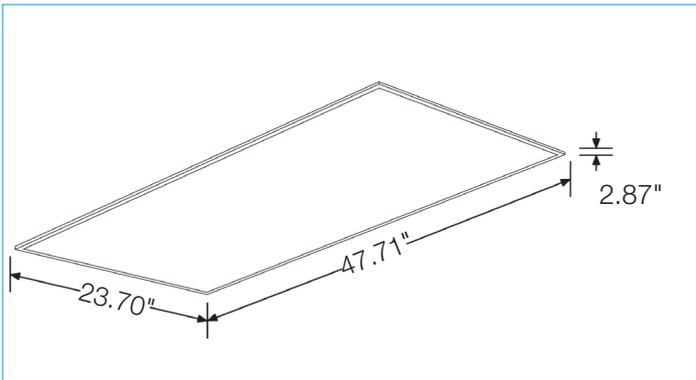

PRODUCT FEATURES

- **Power and CCT Adjustable**
- Color selectable 3500K, 4000K, 5000K
- Wattage selectable 40w/ 50w/ 55w
- A range of high energy-efficiency back-lit LED flat panels for office & commercial lighting applications
- Suitable for installation in T-bar suspended ceilings. Drywall,
- surface mount or suspension kit accessories are available Easy installation & maintenance free
- PMMA light diffuser for even light distribution with 120° beam angle.
- PMMA will not discolor.
- Total depth including the driver box 2.87"
- CRI>80
- High power factor - 0.90
- ALL LED'S dimmable panels provide a simple 0-10V solution that is compatible with stand alone 0-10V dimmers as well as larger lighting control systems and allows for installation with daylight or occupancy sensors
- 0-10V dimmable to 1%
- Operating temperature 32°F to 104°F
- Suitable for damp locations
- DLC (DesignLights Consortium®) certified
- (L90) at 50,000 hour lifetime

Product	AL-BLP24-40/50/55-3CCT/EM
Dimmable	0-10v Dimming to 1%
Voltage	120-277v AC
Watts	40W/ 50W/ 55W
Lumens	5000lm/6250lm/6875lm
Lumens/W	125lm/w
Color Temp	3500K/ 4000K/ 5000K
Life (hrs)	50,000 hrs
W x L x H	23.70" x 47.71" x 2.87"
Beam Angle	120°
Emergency	90mins 15W 1875lm

