

2ft



APEX

High Power Linear LED Highbays


AL-LHB292065CCT/EM

Emergency Linear 2FT 90W / 120W / 165W LED HIGH BAY

PRODUCT FEATURES

- Suitable for use in warehousing, manufacturing, conference centers, industrial and retail applications
- Significant energy savings and maintenance free
- Suitable for most 0-10V dimmers - allows for installation with daylight or occupancy sensors (AL-MSLH, AL-RCLH)
- Suspension from heights of 10' to 25'
- Accessory kit includes 2 x suspension hangers & 2 x 42" suspension chains
- Mounting box available for installation with 3/4 thread pipe
- AL-PMLH (order separately)
- Operating temperature -4°F to 122°F
- Suitable for damp location
- High transmission PS diffuser fitted as standard
- High power factor 0.90
- Color temperature 3500K/4000K/5000K/ (L70) at 50,000 hour lifetime
- 5 year warranty

Dimensions

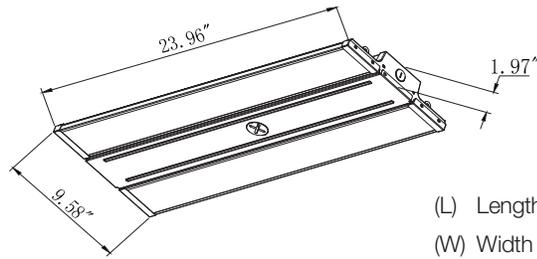

- (L) Length 25.75"
- (W) Width 12.8"
- (H) Height 2.00"



Center sensor and remote sold separately

AL-MSLH
Microwave sensor

AL-RCLH
Remote control for sensor options

Product Code	AL-LHB292065CCT/EM
Wattage Selectable	90W/120W/165W
Lumens IN EMERGENCY MODE	3360LM X 90 minutes
140lm/w	≤12600 / 16800 / 23100lm
Weight	12.lbs
Input Voltage	100-277V AC
Color Temperature	3500K/4000K/5000k
CRI	>80
Location Information	Damp Location
Warranty	5 Years
Operating Temperature	-4°F~+122°F
Beam Angel 120deg	LENS IS NOT ADJUSTABLE
Lifetime	50,000hrs
Dimmable	0-10V



120°

50,000
HRS
lifetime



Dim



≤12600/16800/23100
lumens



CCT
Selectable



Email us at info@all-ledusa.com

www.all-ledusa.com