

AL-AL701050CCT (TYPE III-IV-V)


AREA LIGHT 70W / 100W / 150W 100-277V 10KV Wattage and CCT Selectable

PRODUCT FEATURES

- Excellent optical design type III - IV - V
- Significant energy savings and maintenance free
- Instant on/off, no re-strike delay
- 130lm/w up to 19500Lm
- **10KV** surge protection
- EPA ratings
- Suitable for wet locations IP65
- Wattage selectable 70W / 100W / 150W
- Color selectable 3000K / 4000K / 5000K
- Operating temperature -40°F to +122°F
- (L70) at 50,000 hours lifetime
- B3 U3 G3



Dimensions

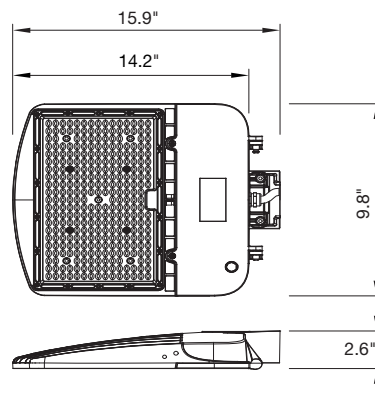

Model	AL-AL701050CCT	AL-AL701050CCT	AL-A701050CCT
Power	70W	100W	150W
L130 Lumens Per Watt	9100lm	13000lm	19500lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
Net Weight	6.48 lbs	6.48 lbs	6.48 lbs
Input Voltage	100-277V AC	100-277V AC	100-277V AC
Power Factor	0.90	0.90	0.90
LED Type	SMD	SMD	SMD
CRI	>80	>80	>80
Location Information	Wet Location	Wet Location	Wet Location
Warranty	5 Years	5 Years	5 Years
Operating Temperature	-40°F~122°F	-40°F~122°F	-40°F~122°F
Beam Angle type III as standard	Suffix for lens type IV - V	Suffix for lens type IV - V	Suffix for lens type IV - V
Frequency	50/60hz	50/60hz	50/60hz
Dimming Protocol	0-10V	0-10V	0-10V
Body Material	Die-Cast Body, Polycarbonate Lens	Die-Cast Body, Polycarbonate Lens	Die-Cast Body, Polycarbonate Lens
Impact Resistance	IK08	IK08	IK08