


AL-AL202430CCT (TYPE III-IV-V)

AREA LIGHT 200W/240W/300W 100-277V 10KV Wattage and CCT Selectable

PRODUCT FEATURES

- Excellent optical design type III - IV - V
- Significant energy savings and maintenance free
- Instant on/off, no re-strike delay
- 130lm/w up to 39000Lm
- **10KV** surge protection
- EPA ratings
- Suitable for wet locations IP65
- Wattage selectable 200W 240W 300W
- Color selectable 3000K / 4000K / 5000K
- Operating temperature -40°F to +122°F
- (L70) at 50,000 hours lifetime
- B3 U3 G3

Dimensions

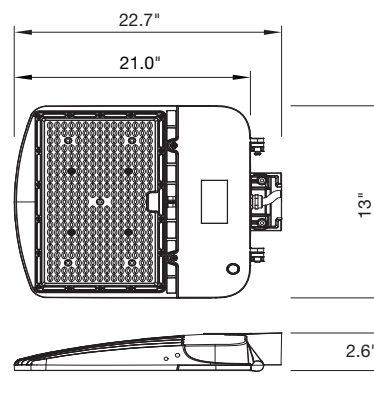

Product Code	AL-AL202430CCT	AL-AL202430CCT	AL-AL202430CCT
Power	200W	240W	300W
130 Lumens Per Watt	26000lm	31200lm	39000lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
Net Weight	10.75 lbs	10.75lbs	10.75lbs
Input Voltage	100-277V AC	100-277V AC	100-277V AC
Power Factor	0.90	0.90	0.90
LED Type	SMD	SMD	SMD
CRI	>80	>80	>80
Location Information	Wet Location	Wet Location	Wet Location
Warranty	5 Years	5 Years	5 Years
Operating Temperature	-40°F~122°F	-40°F~122°F	-40°F~122°F
Beam Angle type III as standard	Suffix for lens type IV - V	Suffix for lens type IV - V	Suffix for lens type IV - V
Frequency	50/60hz	50/60hz	50/60hz
Dimming Protocol	0-10V	0-10V	0-10V
Body Material	Die-Cast Body, Polycarbonate Lens	Die-Cast Body, Polycarbonate Lens	Die-Cast Body, Polycarbonate Lens
Impact Resistance	IK08	IK08	IK08