

1'-4'



AR-LPUD1436 RANGE


Edge Slimline Dimmable Single Suspended LED Panel

PRODUCT FEATURES

- A range of high energy-efficiency edge-lit LED panel for office and commercial lighting applications
- Suspension kit supplied as standard with the panel
- PMMA light guide and PS diffuser, 60% down down and 40% uplighting to create overall feeling of space and light
- SINGLE SUSPENSION ONLY (not linkable)
- PMMA will not discolor
- White profile frame – depth 1.18"
- Adjustable length of suspension allowing a drop of 47" as standard and positioning of suspension wire along the length of the panel allows for minor adjustments
- CRI>80
- High power factor - 0.90
- ALL-LED's dimmable panels provide a simple 0-10V solution that is compatible with stand alone 0-10V dimmers as well as larger lighting control systems and allows for installation with daylight or occupancy sensors
- Compatible with Lutron 0-10V dimmers
- Operating temperature -4°F to 104°F
- Suitable for damp locations
- Available color temperatures 3500K, 4000K, 5000K DLC
- (DesignLights Consortium®) certified
- (L70) at 50,000 hour lifetime
- 5 year warranty



Dimensions

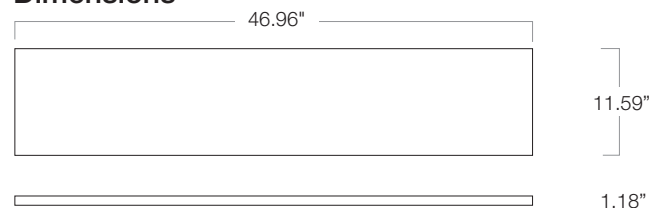

Product Code	AR-LPUD1436/35	AR-LPUD1436/40	AR-LPUD1436/50
Dimmable	0-10V Dimmable	0-10V Dimmable	0-10V Dimmable
Voltage	120 - 277V AC	120 - 277V AC	120 - 277V AC
Watts	36w	36w	36w
Lumens	≤3780lm	≤3780lm	≤3780lm
Lumens/W	105lm/W	105lm/W	105lm/W
Color Temp	3500K	4000K	5000K
Lifetime	50,000 hours	50,000 hours	50,000 hours
Suspension	47.00"	47.00"	47.00"
W x L x H	11.59" x 46.96" x 1.18"	11.59" x 46.96" x 1.18"	11.59" x 46.96" x 1.18"
Weight	7.37 lbs	7.37 lbs	7.37 lbs