

# 4" & 6"



AL-RL4/4/CCT  
AL-RL4/6/CCT

## Excalibur Recessed Linear 4ft

### PRODUCT FEATURES

- For installation into suspended ceilings only
- Grid ceiling t-bar mount design
- External LED driver
- CCT selectable (3000k / 3500k / 4000k)
- Input voltage 120-277V AC
- 1-10v dimmable
- CRI 80
- Quick fit
- 4" and 6" available in 2ft or 4ft
- Suitable for damp location
- (L70) at 50,000 hours lifetime
- 5 year warranty
- Dry wall frame available


### Part Number Builder

AL-RL/\*/\*CCT


SELECT LENGTH      SELECT WIDTH

4 - 4FT      6 - 6"

### Profile

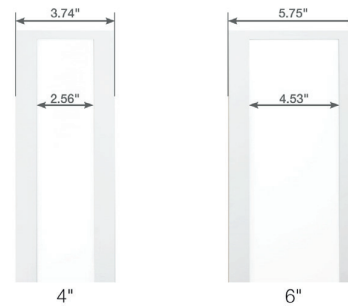

### Rear View

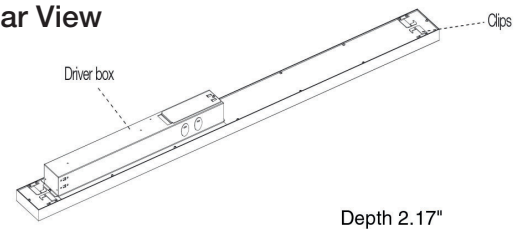

Product Code	AL-RL4/4/CCT	AL-RL4/6/CCT
Size	4ft / 4inch wide	4ft / 6inch wide
Wattage/Lumens	40W 3800lm	40W 4400lm
Beam Angle	120°	120°
CCT	3000K / 3500K / 4000K	3000K / 3500K / 4000K
CRI	>80	>80
Lifetime	50,000 hours	50,000 hours
Operating Temperature	-4°~113°F	-4°~113°F
Location Information	Damp Location	Damp Location
Voltage	120 - 277V AC	120 - 277V AC
Dimmable	1-10v Dimmable	1-10v Dimmable
Warranty	5 Years	5 Years



Email us at [info@all-ledusa.com](mailto:info@all-ledusa.com)

[www.all-ledusa.com](http://www.all-ledusa.com)