

4" & 6"




AL-SL4/4/CCT
AL-SL4/6/CCT

Excalibur Surface Linear 4ft


PRODUCT FEATURES

- Slimline surface mount
- Low profile design
- Integral LED driver
- CCT selectable (3000K / 3500K / 4000K)
- Input voltage 110-347V AC
- 1-10V dimmable
- CRI 80
- Quick fit
- 4" and 6" available in 2ft or 4ft
- Suitable for damp location
- (L70) at 50,000 hours lifetime
- 5 year warranty

Profile



Rear View

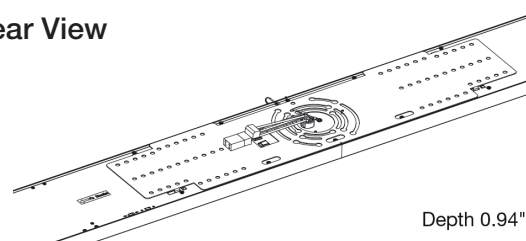

Part Number Builder

AL-SL/**/CCT

SELECT LENGTH SELECT WIDTH

4 - 4FT 6 - 6"

Product Code	AL-SL/4/4/CCT	AL-SL/4/6/CCT
Size	4ft / 4inch wide	4ft / 6inch wide
Wattage (100 Lumens Watt)	40W 4000lm	40W 4400lm
Beam Angle	112°	112°
CCT	3000K / 3500K / 4000K	3000K / 3500K / 4000K
CRI	>80	>80
Lifetime	50,000 hours	50,000 hours
Operating Temperature	-4°~113°F	-4°~113°F
Location Information	Damp Location	Damp Location
Voltage	110 - 347V AC	110 - 347V AC
Dimmable	1-10v Dimmable	1-10v Dimmable
Warranty	5 Years	5 Years