

AL-BLP14-20/25/30W-3CCT

Back Lit CCT & Power Adjustable LED 1'X4' Dimmable LED Panel

PRODUCT FEATURES

- Power and CCT adjustable
- Color selectable 3500K, 4000K, 5000K
- Wattage selectable 20w/ 25w/ 30w
- A range of high energy-efficiency back-lit LED flat panels for office & commercial lighting applications
- Suitable for installation in T-bar suspended ceilings. Optional drywall, surface mount or suspension kit accessories are available
- Easy installation & maintenance free
- PMMA light guide material and PS diffuser, for even light distribution with 120° beam angle
- PMMA will not discolor
- Total depth including the driver box 1.38"
- CRI>80
- High power factor - 0.90
- ALL-LED's dimmable panels provide a simple 0-10V solution that is compatible with stand alone 0-10V dimmers as well as larger lighting control systems and allows for installation with daylight or occupancy sensors
- Compatible with 0-10V dimmers to 1%
- Operating temperature -4°F to 104°F
- Suitable for damp locations
- DLC (DesignLights Consortium®) certified
- (L90) at 50,000 hours lifetime
- EMERGENCY option available (AL-BLP14-20/25/30-CCT/EM)

ACCESSORIES

AR-SKLPB100 - SUSPENSION KIT

AR-DWK14C - Dry wall flange kit

AL-SMKBL14 - Surface mount kit


Product Code	AL-BLP14/20/25/30W-3CCT
Dimmable	0-10v Dimming to 1%
Voltage	120-277v AC
Watts	20w/ 25w/ 30w
Lumens	2500lm/3125lm/3700lm
Lumens/W	125lm/w
Color Temp	3500K/ 4000K/ 5000K
Lifetime	50,000 hours
W x L x H	11.88" x 47.71" x 1.38"
Weight	8.25lbs
Beam Angle	120°
15w EMERGENCY 90min	1875lm

Product Code	AL-BLP12/20/25/30-3CCT/EM
--------------	---------------------------

EM - 90mins

15W 1875LM

Dimensions

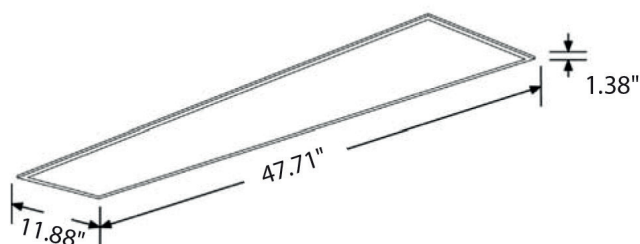

EMERGENCY depth including junction box 3.14"



Email us at info@all-ledusa.com

www.all-ledusa.com