

PRIME
Quality Commercial Lighting

AL-LPUD40/CCT

Architectural Suspended Linear Indirect-Direct Light

PRODUCT FEATURES


- CCT selectable: 3000K/3500K/4000K
- Connectable up to 8 units
- Includes cover plate
- Laser etched light-guide
- Edge lit (no glare)
- Excellent uniformity
- Lightweight aluminum construction
- 4200 lm, 55% down & 45% up
- UGR rating <19
- 50,000 hrs DLC approved 5 year warranty



Joining Bracket

8 units can be joined together for 32 ft run

Dimensions

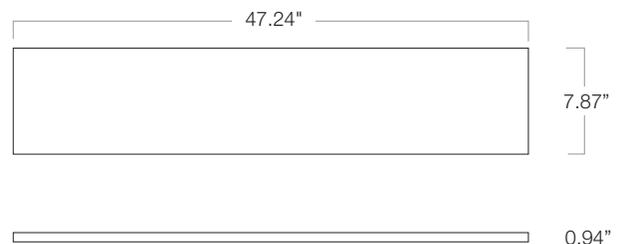

Product Code	AL-LPUD40/CCT
Dimmable	0-10v Dimming
Voltage	120-277v AC
Watts	40w
Lumens	≤4200 lm
Color Temp	3000K / 3500K / 4000K
Lifetime	50,000 hrs
Suspension	51.2" (Adjustable)
W x L x H	47.24' x 7.87' x 0.94

