


TECHNICAL DATASHEET

AR-TF2230BD/**EM Range NEW CONSTRUCTION DIMMABLE EMERGENCY LED TROFFER



PRODUCT FEATURES

- Emergency LED battery provides minimum 90 minutes of operation at approximately 25% output
- Meets or exceeds all National Electric Code and Life Safety Code Emergency Lighting Requirement
- A range of high energy-efficiency LED Troffers for office and commercial lighting applications
- Suitable for installation in T-bar suspended ceilings.
- Optical polycarbonate diffuser, for even light distribution with 120° beam angle
- Total depth including the driver box 3.93
- CRI>80
- High power factor - 0.90
- 0-10V Dimming
- Operating temperature 32°F to 104°F
- Available color temperatures 3500K, 4000K, 5000K
- Suitable for damp locations
- DLC Premium (DesignLights Consortium®) certified (L70) at 50,000 hours lifetime
- 5 Year warranty

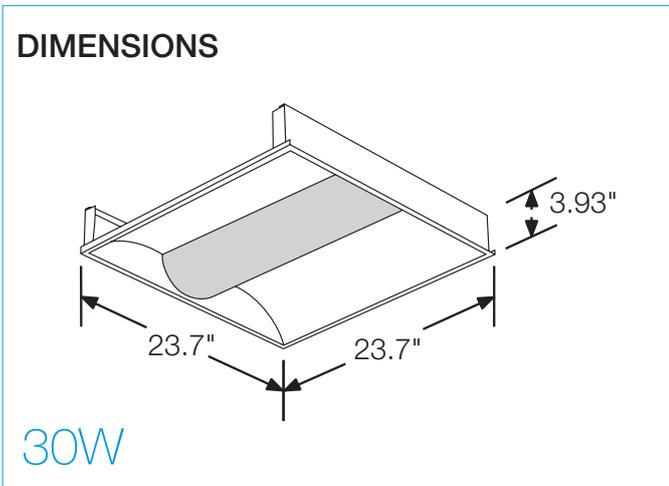

REAR VIEW



REMOVABLE DUST COVER



PRODUCT CODE	AR-TF2230BD/35EM	AR-TF2230BD/40EM	AR-TF2230BD/50EM
Dimming	0-10V Dimmable	0-10V Dimmable	0-10V Dimmable
Voltage	100 - 277V AC	100 - 277V AC	100 - 277V AC
Watts	30W	30W	30W
Lumens	≤3750lm	≤3750lm	≤3750lm
Lumens (Emergency Mode)	≤937.5lm (25%)	≤937.5lm (25%)	≤937.5lm (25%)
Emergency (Minutes)	90min	90min	90min
Lumens/w	125lm/W	125lm/W	125lm/W
Color Temp	3500K	4000K	5000K
Life (hrs)	50,000 hours	50,000 hours	50,000 hours
W x L x H	23.7 x 23.7 x 3.93"	23.7 x 23.7 x 3.93"	23.7 x 23.7 x 3.93"