

4" Gimble



2700K

3000K

4000K

5000K


AL-G4010 RANGE

4" 10W LED Adjustable Retrofit Downlight

PRODUCT FEATURES

- Dimmable on most leading / trailing edge 120V dimmers
- Lightweight aluminum body
- White bezel
- Lifetime 50,000hrs
- Universal clips / easy install
- 5 year warranty
- IC rated if used in IC rated can

Dimensions

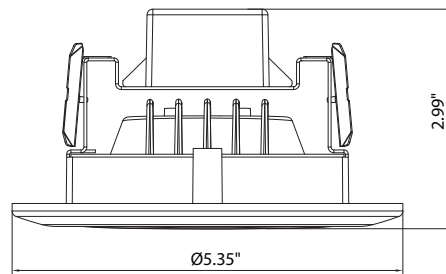

(OD) 5.35" Overall Ø
(RD) 2.959" Recess Depth

10W

≤700 lumens

90°

Dim

50,000 HRS lifetime

120V

ETL Intertek

FCC

ENERGY STAR

5 Year Warranty

DAMP LOCATIONS

CALIFORNIA TITLE 24 COMPLIANT LAMP

Product Code	AL-G4010/27	AL-G4010/30	AL-G4010/40	AL-G4010/50
Input Voltage	120V	120V	120V	120V
Dimmable	Yes	Yes	Yes	Yes
Operating Temp	-4° ~ 104°	-4° ~ 104°	-4° ~ 104°	-4° ~ 104°
Wattage	10W	10W	10W	10W
Lifetime (hrs)	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs
Input Frequency	60Hz	60Hz	60Hz	60Hz
Location Information	Damp Location	Damp Location	Damp Location	Damp Location
Power Factor	>0.9	>0.9	>0.9	>0.9
Overall Diameter (Inches)	Ø5.35"	Ø5.35"	Ø5.35"	Ø5.35"
Beam Angle	90°	90°	90°	90°
Lumens	≤700 lm	≤720 lm	≤740 lm	≤740 lm
CCT	2700K	3000K	4000K	5000K