

3"




AL-DL3

Alpha LED Downlight Range

PRODUCT FEATURES

- High lumen output 3" anti glare LED downlight
- High performance LED engines
 - 10w engine - 850lm - IC
 - 18w engine - 1620lm - Non-IC
- Input Voltage
 - 10w engine - TRIAC 120v or (0-10v 100 - 277V AC)
 - 18w engine - TRIAC 120v or (0-10v 100 - 277V AC)
- New construction housing available
- TRIAC dimmable as standard (0-10V Dimming Available)
- CRI 90
- Available in 3000K
- Suitable for damp location
- (L70) at 50,000 hours lifetime
- 5 year warranty

ENGINES

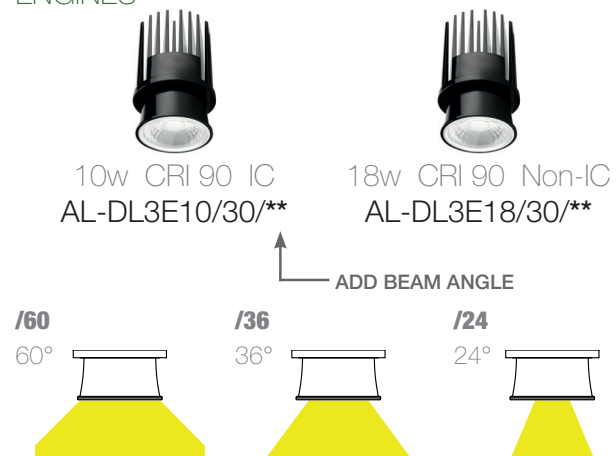

Product Code	AL-DL3E10/30/**	AL-DL3E10277/30/**	AL-DL3E18/30/**	AL-DL3E18277/30/**
Wattage	10W	10W	18W	18W
Lumens	850lm (85 lm/w)	850lm (85 lm/w)	1620lm (90 lm/w)	1620lm (90 lm/w)
Beam Angle	24° / 36° / 60°	24° / 36° / 60°	24° / 36° / 60°	24° / 36° / 60°
CCT	3000K	3000K	3000K	3000K
CRI	>90	>90	>90	>90
Lifetime	50,000 hours	50,000 hours	50,000 hours	50,000 hours
Operating Temperature	-4°~113°F	-4°~113°F	-4°~113°F	-4°~113°F
Location Information	Damp Location	Damp Location	Damp Location	Damp Location
Voltage	120V AC	100 - 277V AC	120V AC	100 - 277V AC
Dimmable	Triac Dimmable	0-10v Dimmable	Triac Dimmable	0-10v Dimmable
Warranty	5 Years	5 Years	5 Years	5 Years




Email us at info@all-ledusa.com

www.all-ledusa.com




TRIMS

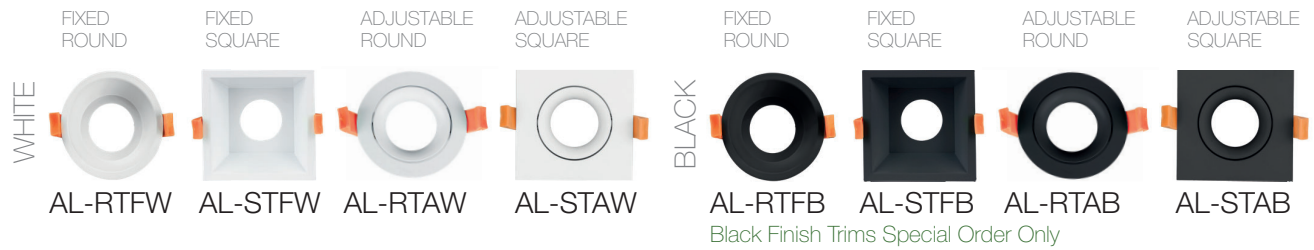

INSTALL HOUSING DIMENSIONS

Led Driver Box For New Construction

AL-MF3

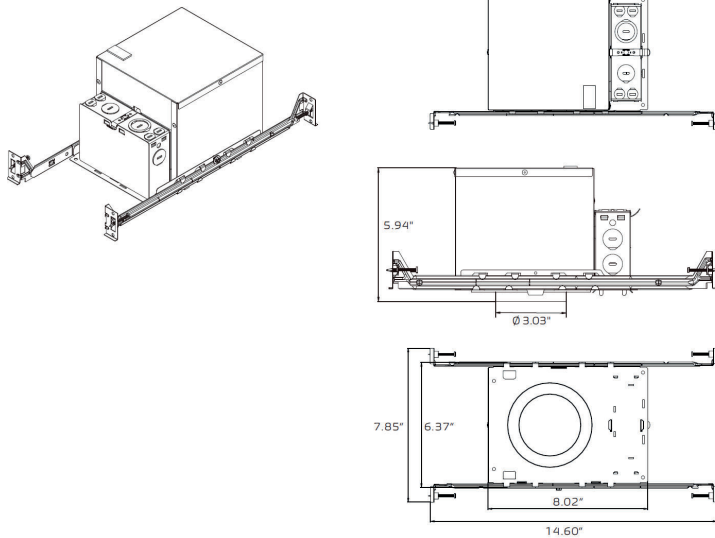

Led Driver Box For Retrofit

