


# 4/6/8/10"

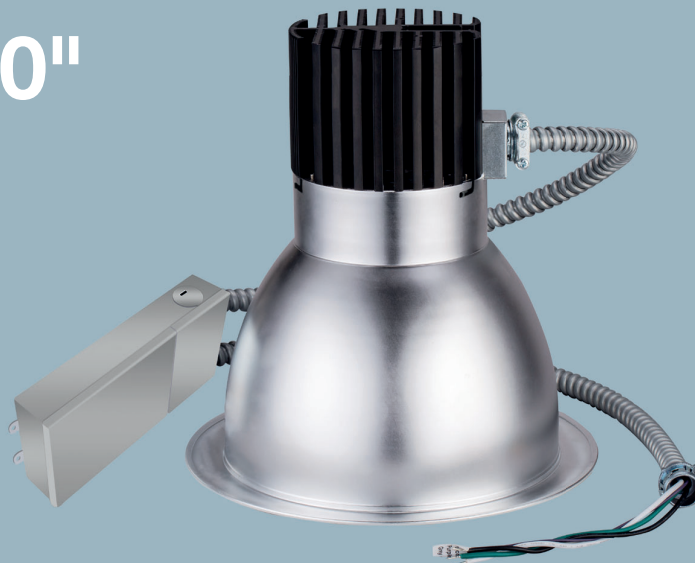

AL-CDS\*\*/\*\*

## BOSS Range Commercial Downlights

### PRODUCT FEATURES

- Available in 4" / 6" / 8" / 10" trim
- Power selectable engines
  - 27w engine - 14W/20W / 27W selectable 4" trim only
  - 40w engine - 18w / 27w / 40w selectable wattage - 6" / 8" / 10" trim available
  - 80w engine - 50w / 65w / 80w selectable wattage - 6"/ 8" / 10" trim available
- Input voltage
  - 40w engine - 100V - 277V AC
  - 80w engine - 110V - 347V AC
- Fits existing architectural and commercial drame
- 0-10V Dimming
- Comfortable Diffused Light.
- 27W engine - selectable CCT 3000K 3500K 4000K
- 40w engine - selectable CCT 3000K 3500K 4000K
- 80W available in 3500K or 4000K only
- Suitable for damp Docation
- (L70) at 50,000 hours lifetime
- 5 year warranty



### ENGINES



14w / 20w / 27w  
AL-CDS4/CCT



18w / 27w / 40w  
AL-CDS40/CCT



50w / 65w / 80w  
AL-CDS80

### EMERGENCY PACK



120 minutes 100-277v AC  
AL-H08170-EM 8W (AL-CDS40/CCT)  
AL-H25170-EM 25W (AL-CDS80/CCT)

Product Code	AL-CDS4/CCT	AL-CDS40/CCT	AL-CDS80/35 or AL-CDS80/40
Wattage	14W / 20W/27W	18W / 27W / 40W (Power Selectable)	50W / 65W / 80W (Power Selectable)
Lumens	≤2200lm (80lm/w)	≤3200lm (80lm/w)	≤6400lm (80lm/w)
Beam Angle	50°	50°	50°
CCT	3000K / 3500K / 4000K	3000K / 3500K / 4000K	3500K / 4000K
CRI	>80	>80	>80
Lifetime	50,000 hours	50,000 hours	50,000 hours
Operating Temperature	-4°~113°F	-4°~113°F	-4°~113°F
Location Information	Damp Location	Damp Location	Damp Location
Voltage	100 - 277V AC	100 - 277V AC	110-347V AC
Dimmable	0-10v Dimmable	0-10v Dimmable	0-10v Dimmable
Warranty	5 Years	5 Years	5 Years




Call us on +1 727 524 4270

www.all-ledusa.com



## TRIMS

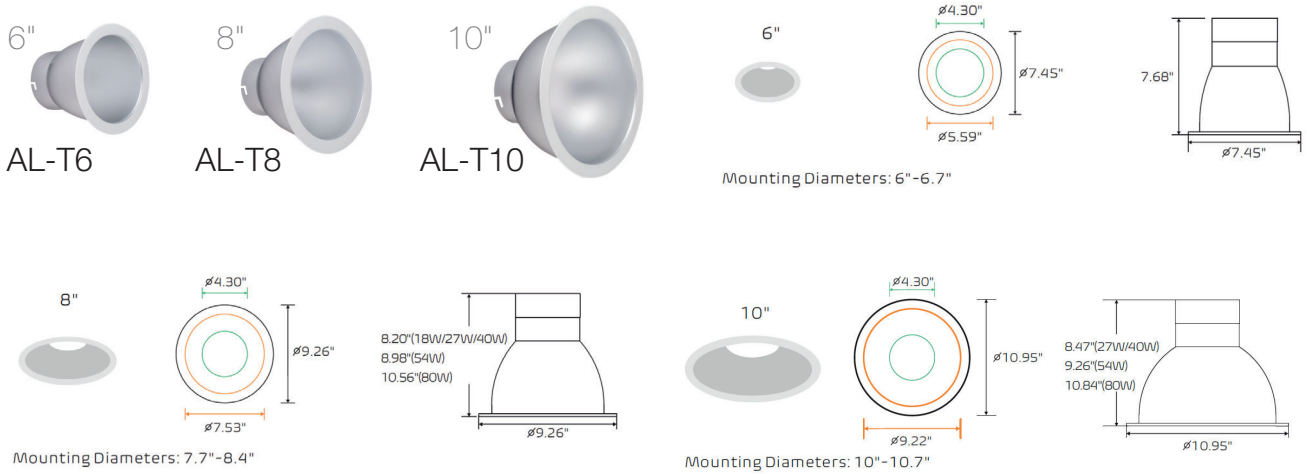

## INSTALL HOUSING DIMENSIONS

