


TECHNICAL DATASHEET

AL-MW15225

MINI WALL PACK - CCT & WATT SELECTABLE



Dimensions

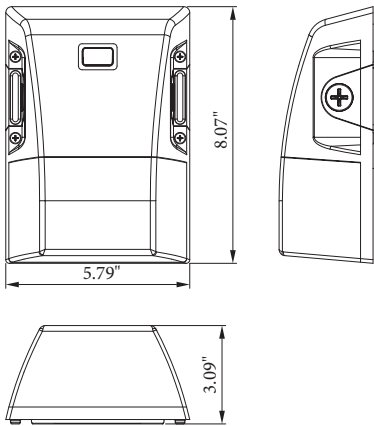


Width : 5.79"
Height : 8.07"
Projection : 3.09"

15W/20W/25W

Additional accessories sold separately

PRODUCT FEATURES

- Suitable for use in warehousing, industrial, and commercial buildings
- Significant energy savings and maintenance free
- Polycarbonate lens with 90 x 140° beam as standard
- Instant on/off, no re-strike delay
- Built in Photocell On <2Fc Off >5Fc
- Suitable for wet locations IP65
- Power selectable 15W/20W/25W
- CCT selectable 3000K, 4000K, 5000K
- Operating temperature -40°F to +131°
- (L70) at 50,000 hours lifetime

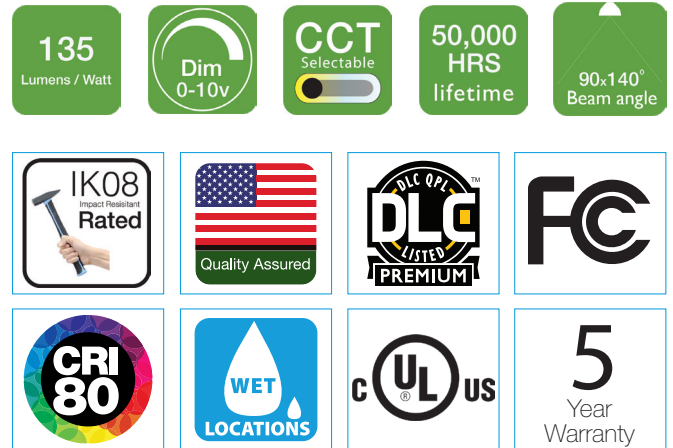

Model	AL-MW15225
Power	15w / 20w / 25w
Lumens Per Watt	135lm/w
Color Temperature	CCT Selectable (3000K / 4000K / 5000K)
Net Weight	15 lbs
Input Voltage	100-277V AC
Power Factor	0.90
LED Type	SMD
CRI	>80
Location Information	Wet Location
Warranty	5 Years
Operating Temperature	-31°F~131°F
Beam Angle	90 x 140°
Frequency	50/60hz
Dimming Protocol	0-10V
Body Material	Polycarbonate
Impact Resistance	IK08