

TECHNICAL DATASHEET


AR-TF2440BD RANGE NEW CONSTRUCTION DIMMABLE LED TROFFER



PRODUCT FEATURES

- A range of high energy-efficiency LED Troffers for office and commercial lighting applications
- Suitable for installation in T-bar suspended ceilings.
- Optical polycarbonate diffuser, for even light distribution with 120° beam angle
- Total depth including the driver box 3.93"
- CRI>80
- High power factor - 0.90
- ALL-LED's dimmable panels provide a simple 0-10V solution that is compatible with stand alone 0-10V dimmers as well as larger lighting control systems and allows for installation with daylight or occupancy sensors
- Operating temperature -4 to 104°F
- Available color temperatures 3500K, 4000K, 5000K
- Suitable for damp locations
- DLC Premium (DesignLights Consortium®) certified
- (L70) at 50,000 hours lifetime
- 5 Year warranty


DIMENSIONS

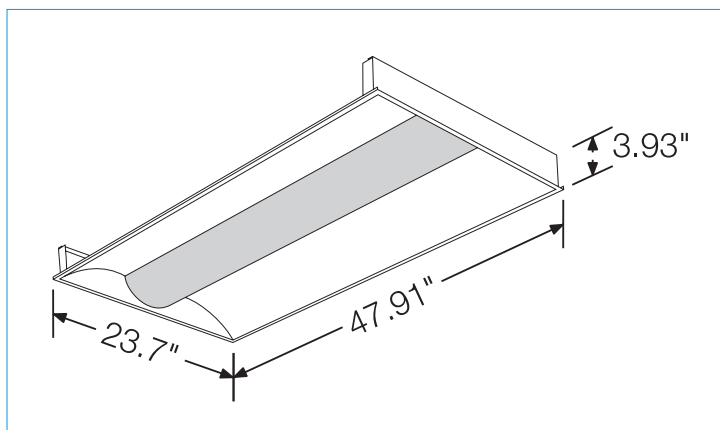

REMOVABLE DUST COVER



REAR VIEW



PRODUCT CODE	AR-TF2440BD/35	AR-TF2440BD/40	AR-TF2440BD/50
Dimming	0-10V Dimmable	0-10V Dimmable	0-10V Dimmable
Voltage	100 - 277V AC	100 - 277V AC	100 - 277V AC
Watts	40W	40W	40W
Lumens	≤5000lm	≤5000lm	≤5000lm
Lumens/W	125lm/W	125lm/W	125lm/W
Color Temperature	3500K	4000K	5000K
Lifetime	50,000 hours	50,000 hours	50,000 hours
W x L x H	23.7 x 47.91 x 3.93"	23.7 x 47.91 x 3.93"	23.7 x 47.91 x 3.93"
Weight	15.64lbs	15.64lbs	15.64lbs