

4ft



APEX

High Power Linear LED Highbays


AL-LHB4202550CCT/EM

Emergency Linear 4ft 200W / 225W / 250W LED HIGH BAY

PRODUCT FEATURES

- Suitable for use in warehousing, manufacturing, conference centers, industrial and retail applications
- Significant energy savings and maintenance free
- Suitable for most 0-10V dimmers - allows for installation with daylight or occupancy SENSOR AL-MSLH - REMOTE AL-RCLH
- Suspension from heights of 25' to 35'
- Accessory kit includes 2 x suspension hangers & 2 x 42" suspension chains
- Mounting box available for installation with 3/4 thread pipe AL-PMLH (order separately)
- Operating temperature -22°F to 122°F
- Suitable for damp location
- High transmission PS diffuser fitted as standard
- 120° beam angle
- High power factor 0.90
- Color temperature 3500K/4000K/5000K/
- (L70) at 50,000 hour lifetime
- 5 year warranty

Dimensions

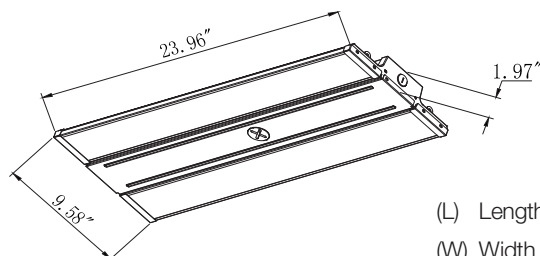

(L) Length 25.75"

(W) Width 12.8"


(H) Height 2.00"



Center sensor and remote sold separately

AL-MSLH
Microwave sensorAL-RCLH
Remote control for sensor options

Product Code	AL-LHB4202550CCT/EM
Wattage Selectable	200W/225W/250W
Lumens IN EMERGENCY MODE	3360LM X 90 MINUTES
Lumens per watt 140lm/w	140lm/w
Weight	19.lbs
Input Voltage	100-277V AC
Color Temperature	3500K/4000K/5000k
CRI	>80
Location Information	Damp Location
Warranty	5 Years
Operating Temperature	-22°F~+122°F
Beam Angel	120° degree only
Lifetime	50,000hrs
Dimmable	0-10V

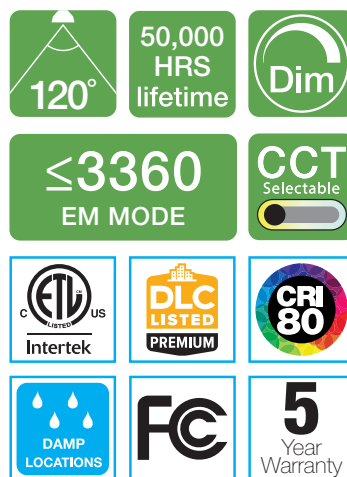Email us at info@all-ledusa.comwww.all-ledusa.com