



AL-WP68100CCT

## Traditional Wall Pack CCT & Wattage Selectable

### PRODUCT FEATURES


- Suitable for use on exterior warehousing, industrial, and commercial buildings (Emergency Available)
- Significant energy savings and maintenance free
- 0-10V dimming with most 0-10V dimmers
- IK08 glass lens with 95 to 100° beam as standard
- Instant on/off, no re-strike delay
- AC100-277 volts
- Suitable for wet locations IP65
- Power selectable 60W/80W/100W
- CCT selectable 3000K, 4000K, 5000K
- Built in optional Photocell
- (L70) at 50,000 hours lifetime

Product Code	AL-WP68100CCT
Power	60w / 80w / 100w
Lumens Per Watt	130lm/w
Color Temperature	3000K / 4000K / 5000K
Net Weight	10 lbs
Input Voltage	100-277V AC
Power Factor	0.9
LED Type	SMD
CRI	>80
Location Information	Wet Location
Warranty	5 Years
Operating Temperature	-40°F~131°F
Beam Angle	95 x 1000
Frequency	50/60hz
Dimming Protocol	0-10V
Body Material	Die-Cast Body, Glass Lens
Impact Resistance	IK08
Product Code	AL-WP68100CCT/EM

8W EMERGENCY 90 Mins

1040lm

### Dimensions

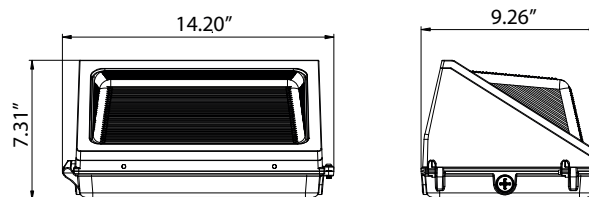

Width : 14.20"

Height : 9.26"

Projection : 7.31"



Call us on +1 727 524 4270

www.all-ledusa.com