


# 2'x2'

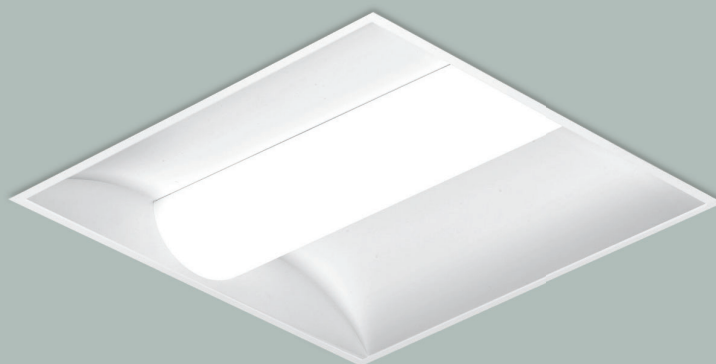

AL-TF2234CCT/PS


## 2'x2' LED Center Basket Troffer CCT & Power Selectable

### PRODUCT FEATURES

- Power and CCT adjustable
- Color selectable 3500K, 4000K, 5000K
- Wattage selectable 30w/ 35w/ 40w
- A range of energy-efficiency LED troffers for office and commercial lighting applications
- Suitable for installation in T-bar suspended ceilings
- Optical polycarbonate diffuser, for even light distribution with 120° beam angle
- Total depth including the driver box 2.61"
- CRI>80
- High power factor - 0.90
- ALL-LED's dimmable panels provide a simple 0-10V solution that is compatible with stand alone 0-10V dimmers as well as larger lighting control systems and allows for installation with daylight or occupancy sensors
- Operating temperature -4°F to 104°F
- Suitable for damp locations
- DLC Premium (DesignLights Consortium®) certified
- (L70) at 50,000 hours lifetime
- 5 Year warranty
- EMERGENCY option available (AL-TF2234CCT/PS/EM)



### Dimensions

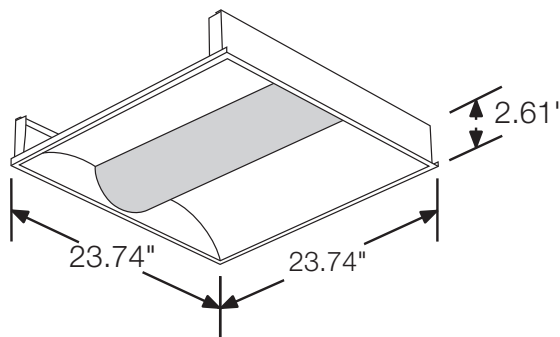

Product Code	AL-TF2234CCT/PS
Dimmable	0-10v Dimming
Voltage	120-277v AC
Watts	30w/ 35w/ 40w
Lumens	≤3750lm/ ≤4375/ ≤5000
Lumens/W	125lm/w
Color Temp	3500K/ 4000K/ 5000K
Lifetime	50,000 hours
W x L x H	23.74 x 23.74 x 2.61"
Weight	8.58lbs
Beam	120°

Product Code	AL-TF2234CCT/PS/EM
--------------	--------------------

EM - 90mins

8W 1000LM



Email us at [info@all-ledusa.com](mailto:info@all-ledusa.com)

[www.all-ledusa.com](http://www.all-ledusa.com)